

# Schlegel Weather Seal Range




Technical Data Sheet  
Product = QLON 3097

Testing undertaken to ISO 9001/2000; BSI Registration FM15052 (since 29/07/1992)

Specification			
Characteristic	Value	Units	Test Method
<b>ACLD</b> (Aged Compression Load Deflection)	10.0 – 17.0 N/100mm	Newtons per 100mm length	In House
<b>Compression Set</b>	>20% set after 24hours (50% compression) @ 70°C	% Recovery mm	In House
<b>Dimensions</b>		mm	In House

[BS EN 12365:2003](#) Part 4 Classification W 3 3 5 7 7 (Please note – ‘recovery after aging’ is not applicable to this assessment)

## Drawing Detail

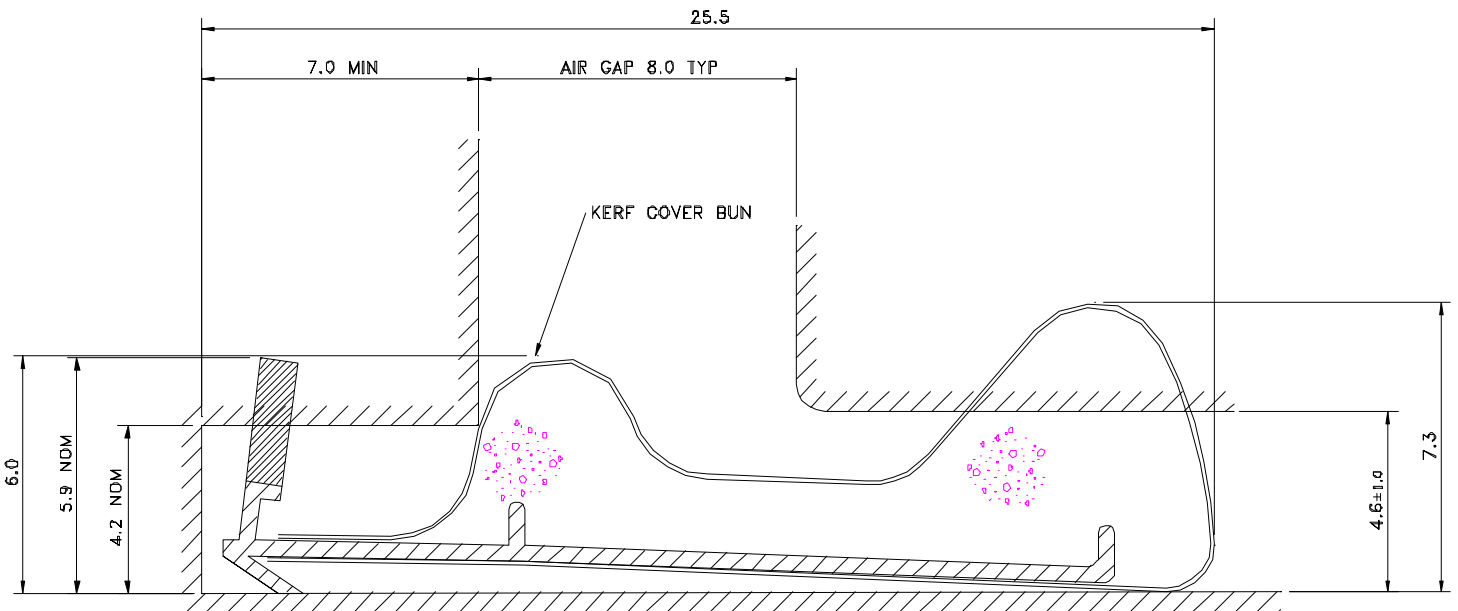

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS  
Phone: +44 1462 815500 Fax: +44 1462 811963  
e:Mail: [schlegeluk@schlegel.eu.com](mailto:schlegeluk@schlegel.eu.com)

## Material / Components

Exterior Liner = Poly-ethylene, low friction, UV stable  
Exterior Liner Melt Index = approx. 0,85 g/10 min at 190 °C,, 2,16 kg mass – 2.0MI  
Hard Foot / insert = Poly-propylene back / TPE foot  
Foam Core = H/R Poly-Urethane, exhibiting excellent memory performance over wide temp range

## Nominal Value of Thermal Conductivity

Low density P.E (used for the outer skin) is advised at 0.33 W/mKelvin  
P.U.foam at a density of 70Kg / cubic mtr having a conductivity of 0.05 W/mKelvin  
*A proposed nominal value for all our seals = 0.06W/mKelvin.*

## Fire Rating

These seals are NOT fire resistant but can be used in conjunction with intumesant strips as 'smoke seals' – Smoke seal application testing is undertaken on the whole door set and as such we are unable to provide information on individual seals

## Nominal Values for Sound Reduction Weighting

$R_w(C, C_{tr}) = 32 (-1; -3)$ dB  
 $R_w(C, C_{tr}) = 22 (-1; -1)$ dB  
 $R_w(C, C_{tr}) = 16 (-1; 0)$ dB  
 $R_w(C, C_{tr}) = 29 (0; -2)$ dB

## Packaging Specification

UK Card packing; 2 Coils per box; Nominal \*\*\*m / Coil N/A  
Coil = 825 OD – 425 ID; Box = 710\*710\*380mm

GMBH Packaging 2 Coils per box; Nominal 150m / Coil  
Coil = 790 OD – 570 ID; Box = 775\*775\*380mm

## Part Numbers

02330970	QL 3097	WHT	150M	CL	CL	150
02330971	QL 3097	BRZ	150M	CL	CL	150
02330972	QL 3097	BLK	150M	CL	CL	150
02330973	QL 3097	BGE	150M	CL	CL	150

## BBA Report

CRITERIA	B.B.A. 345/1 1993	B.B.A. Report 1990	Comments
TENSILE STRENGTH AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70 <sup>0</sup> C	0% REDUCTION AFTER 28 DAYS	Q-Lon Exceeds the requirement
ELONGATION AT BREAK AFTER AGEING.	< 25% REDUCTION	> 5% REDUCTION AFTER 28 DAYS.	Q-Lon Exceeds the requirement
HARDNESS CHANGE AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70 <sup>0</sup> C	COMPRESSION FORCE CHANGED BY 5% AFTER 28 DAYS	Q-Lon Exceeds the requirement
TEAR RESISTANCE	RAW MATERIAL TEST ONLY	NO ASSESSMENT	
DEFLECTION RECOVERY 24HRS @ 23 <sup>0</sup> C	> 75% RECOVERY	91.67% RECOVERY @ 70 <sup>0</sup> C	Q-Lon Exceeds the requirement
24hrs @ -15 <sup>0</sup> C	> 75% RECOVERY (LESS THAN 25% SET	100% RECOVERY	
14DAYS @ 55 <sup>0</sup> C	>25% RECOVERY	NOT ASSESSED	
OZONE RESISTANCE		NOT ASSESSED & NOT AFFECTED BY OZONE	This criteria is a limitation of Rubber / E.P.D.M.
DIMENSIONAL STABILITY	HEAT REVERSION < 2%	DIMENSIONAL STABILITY 0.01%	Q-Lon Exceeds the requirement

The B.P.F. have reviewed the 345/1 document and are shortly to publish a revision. The revisions take account of current European draft standards for seals and will most likely include the following changes.

1. Test methods will not be limited to raw material assessment.
2. The test methods will allow the seal performance to be graded as opposed to minimum levels being specified. The system is intended to allow an appropriate seal to be specified for an application. Minimum performances are still assessed via the functionality tests of the complete window / door unit.

### **Performance Benefits Summary**

**Excellent memory** – Returns to original shape after compression

**Stability** – Low/no stretch gained by GF internal cord or insert

**Easily compressed** – Low compression forces, Unaffected by temp variance (tested to -30oC to +70oC)

**Acoustic performance** – Independent testing and comparison data available

**Paint and Stain Proof** – Properties un-affected by standard paints and stains

**Stabilised** – Unaffected by rot, Fungi, UV light or Ozone.

**Colour** – Wide range of available options (bronze, white, black, greys, etc)

**Jointing** – Can be joined with silicone sealant or welded in situ'

**Patented.**

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: [schlegeluk@schlegel.eu.com](mailto:schlegeluk@schlegel.eu.com)