

Schlegel Weather Seal Range




Technical Data Sheet
Product = QLON 3053

Testing undertaken to ISO 9001/2000; BSI Registration FM15052 (since 29/07/1992)

Specification			
Characteristic	Value	Units	Test Method
ACLD (Aged Compression Load Deflection)	12.0-20.0 N/100mm	Newtons per 100mm length	In House
Compression Set	>20% set after 24hours (50% compression) @ 70°C	% Recovery mm	In House
Dimensions		mm	In House

[BS EN 12365:2003](#) Part 4 Classification W 2 6 5 6 5 (Please note – ‘recovery after aging’ is not applicable to this assessment)

Drawing Detail

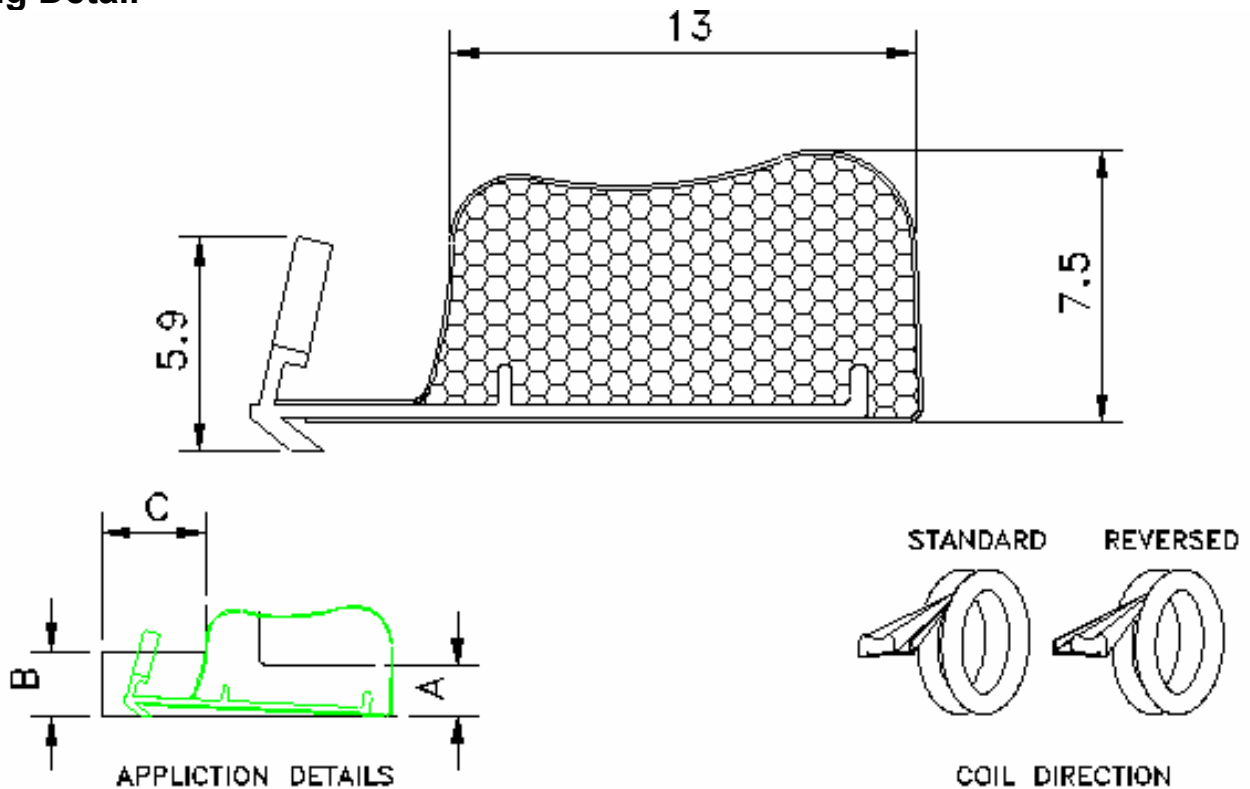

TECHNICAL SPECIFICATION

- A, SEAL GAP. 4.5mm MIN TO 6.5mm MAX
- B, KERF SLOT WIDTH 4.5mm NOMINAL
- C, MINIMUM KERF SLOT DEPTH 7.0mm

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: schlegeluk@schlegel.eu.com


Material / Components

Exterior Liner = Poly-ethylene, low friction, UV stable

Exterior Liner Melt Index = approx. 0,85 g/10 min at 190 °C., 2,16 kg mass – 2.0MI

Hard Foot / insert = Poly-propylene OR Glass fibre roving (part specific) Poly-propylene back / TPE foot for exposed barb products

Foam Core = H/R Poly-Urethane, exhibiting excellent memory performance over wide temp range

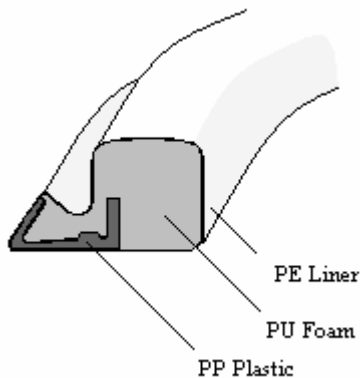

Nominal Value of Thermal Conductivity

Low density P.E (used for the outer skin) is advised at 0.33 W/mKelvin

P.U.foam at a density of 70Kg / cubic mtr having a conductivity of 0.05 W/mKelvin

A proposed nominal value for all our seals = 0.06W/mKelvin.

CO-EFFICIENT OF FRICTION OF LINER (QLON SURFACE)

COF of Quality 163.00; film against steel; DIN EN ISO 8295				
	95 µm	140 µm		
Static	0.241	0.146		
Kinetic	0.251	0.157		

Fire Rating

These seals are NOT fire resistant but can be used in conjunction with intumescent strips as 'smokeseals' – Smoke seal application testing is undertaken on the whole door set and as such we are unable to provide information on individual seals

Nominal Values for Sound Reduction Weighting

$R_w(C, C_{tr}) = 32 (-1; -3)$ dB

$R_w(C, C_{tr}) = 22 (-1; -1)$ dB

$R_w(C, C_{tr}) = 16 (-1; 0)$ dB

$R_w(C, C_{tr}) = 29 (0; -2)$ dB

Packaging Specification

GMBH Packaging 2 Coils per box; Nominal 200m / Coil

Coil = 790 OD – 570 ID; Box = 775*775*380mm

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: schlegeluk@schlegel.eu.com

Part Numbers

02030510	QL3053-10-400AQ	200 GRAPH	CL	200
02030530	QL3053-0-400AQ	200M BRZ	CL	200
02030531	QL3053-1-400AQ	200M WHT	CL	200
02030532	QL3053-2-400AQ	200M BLK	CL	200
02030534	QL3053-4-400AQ	200M BG	CL	200
02030535	QL3053-5-400AQ	200M L/OAK	CL	200
02030536	QL3053-6-400AQ	RAL GREY	CL	200
02030537	QL3053-3-400AQ	M5 D GRY	CL	200
02030539	QL3053-8-400AQ	200M CHNUT	CL	200
02030540	QL3053-0-200AQ	200M BRZ	CL	200
02031531	Q-LON 3053	WHT 200M REV	CL	200
02031532	Q-LON 3053	BLK 200M REV	CL	200
02130530	QL3053-1-400AQM5	200M WHT	CL	200
02130531	QL3053-0-400AQM5	200M BRZ	CL	200
02130533	QL3053-3-400AQ	200M GRYM5	CL	200
02730530	QL 3053	WHT 200M UK	CL	200
02730531	QL 3053	BRZ 200M UK	CL	200
02730532	QL 3053	BLK 200M UK	CL	200
02730533	QL 3053	BEIGE 200M UK	CL	200
02730535	QL3053	L/OAK 200M UK	CL	200

BBA Report

CRITERIA	B.B.A. 345/1 1993	B.B.A. Report 1990	Comments
TENSILE STRENGTH AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70°C	0% REDUCTION AFTER 28 DAYS	Q-Lon Exceeds the requirement
ELONGATION AT BREAK AFTER AGEING.	< 25% REDUCTION	> 5% REDUCTION AFTER 28 DAYS.	Q-Lon Exceeds the requirement
HARDNESS CHANGE AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70°C	COMPRESSION FORCE CHANGED BY 5% AFTER 28 DAYS	Q-Lon Exceeds the requirement
TEAR RESISTANCE	RAW MATERIAL TEST ONLY	NO ASSESSMENT	
DEFLECTION RECOVERY 24HRS @ 23°C	> 75% RECOVERY	91.67% RECOVERY @ 70°C	Q-Lon Exceeds the requirement
24hrs @ -15°C	> 75% RECOVERY (LESS THAN 25% SET	100% RECOVERY	
14DAYS @ 55°C	>25% RECOVERY	NOT ASSESSED	
OZONE RESISTANCE		NOT ASSESSED & NOT AFFECTED BY OZONE	This criteria is a limitation of Rubber / E.P.D.M.
DIMENSIONAL STABILITY	HEAT REVERSION < 2%	DIMENSIONAL STABILITY 0.01%	Q-Lon Exceeds the requirement

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e-Mail: schlegeluk@schlegel.eu.com

The B.P.F. have reviewed the 345/1 document and are shortly to publish a revision. The revisions take account of current European draft standards for seals and will most likely include the following changes.

1. Test methods will not be limited to raw material assessment.
2. The test methods will allow the seal performance to be graded as opposed to minimum levels being specified. The system is intended to allow an appropriate seal to be specified for an application. Minimum performances are still assessed via the functionality tests of the complete window / door unit.

Performance Benefits Summary

Excellent memory – Returns to original shape after compression

Stability – Low/no stretch gained by GF internal cord or insert

Easily compressed – Low compression forces, Unaffected by temp variance (tested to -30oC to +70oC)

Acoustic performance – Independent testing and comparison data available

Paint and Stain Proof – Properties un-affected by standard paints and stains

Stabilised – Unaffected by rot, Fungi, UV light or Ozone.

Colour – Wide range of available options (bronze, white, black, greys, etc)

Jointing – Can be joined with silicone sealant or welded in situ'

Patented. – Selling Seals to the industry for over 30 years

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: schlegeluk@schlegel.eu.com